



*Superb finishing with incredible coverage
using both hand and machine application techniques*





THE NEW GENERATION OF INTERIOR PLASTERING

DECORE PLASTERS are made with high-purity 100% natural gypsum

DECORE PLASTERS are simply different, sophisticated and cover a comprehensive range of one-coat hand-applied plasters, machine-applied plaster & finishing plasters. DECORE PLASTERS are the ideal choice for the creation of refined textures and smooth surfaces that are free of crack and chip.




DE**CORE** PLASTERS are suitable for indoor application over a wide variety of surfaces, like GYP**CORE** PLASTERBOARDS, Cement Blocks, Aircrete Blocks, Brick, Cement and others.

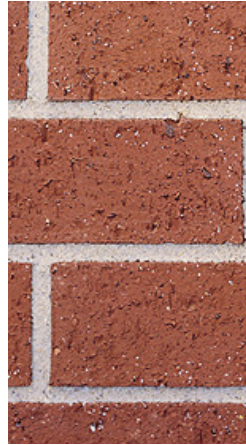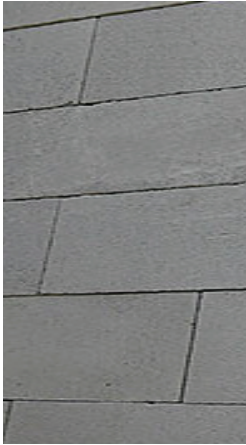




| | | | | | | |
|--|---|---------------|---------------|---------------|--------------|----------------|
| DECORE Product | H100 | H200 | H300 | H350 | M400 | H800 |
| Thickness | 13mm | 13mm | 13mm | 13mm | 20mm | 2-0.5mm |
| Bag/bucket | 25kg pp | 25kg pp | 25kg pp | 25kg pp | 25kg pp | 25kg pp |
| Application type | Hand | Hand | Hand | Hand | Machine | Hand |
| One Coat | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Finishing Coat | | | | | | ✓ |
| Surface | Smooth | Smooth | Extra Smooth | Extra Smooth | Extra Smooth | Finishing Coat |
| Dry Loose Bulk Density (Kg/m³) | 730-750 | 730-750 | 700-720 | 630-650 | | 690-710 |
| Wet Bulk Density (Kg/m³) | 1600-1620 | 1500-1600 | 1450-1550 | 1300-1400 | | 1450-1500 |
| Initial Setting/Drying time | 5-8 min. (available for wall plastering and cornice casting) | 20-30 min. | 20-30 min. | 20-30 min. | 180min. | 20-30 min |
| Coverage (per 25 kg pag) | 20-22 sq. ft. | 20-22 sq. ft. | 20-23 sq. ft. | 23-26 sq. ft. | | |
| Color | White | White | White | White | White | White |
| Workability | Easy | Easy | Easier | Very Easy | | Easier |
| Comprehensive Strenght (N/mm²) | 6-8 | 7-9 | 7-9 | 8-10 | | 7-6 |

ADVANTAGES & BENEFITS

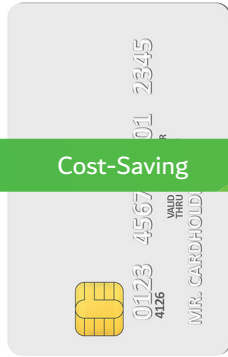

Cost-Saving

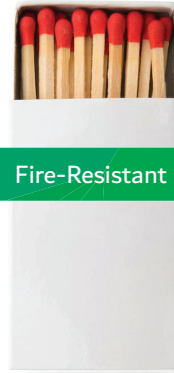


Fire-Resistant



Thermal Insulation




Easy-to-Apply



Direct painting



Acoustic Insulation



No cracks



GLOBAL GYPSUM BOARD CO LLC

| | |
|------------------|---------------------------------|
| Website | www.gypcore.com |
| E-mail | info@gypcore.com |
| Telephone | +968 2321 9444 |
| Fax | +968 2321 9600 |
| Post | P.O.Box 485 |
| Address | Salalah 211 - Sultanate of Oman |



*an extensive range of proven solutions
for partitions, ceilings and wall-linings*



PLASTERBOARD SOLUTIONS FOR ALL AREAS



GYPCORE family of high-performance plasterboards are manufactured as per EN & ASTM international standards.

GYP**CORE** offers a full range of plasterboards to meet all partition and ceiling requirements in all interior areas, including boards equipped with greater fire and moisture resistance properties. GYP**CORE** plasterboards are durable, easy-to-shape and cost-efficient. The ultimate modern gypsum-based solution for the use in ceilings, partitionings & wall-linings.





| Type | Regular | Fire-Resistant | Moisture-Resistant |
|-----------|---|--|--|
| Thickness | 12.5mm / 9mm | 12.5mm / 9mm | 12.5mm / 9mm |
| length | 2400mm for 12.5mm 8ft (2440mm) for 9mm | 2400mm for 12.5mm 8ft (2440mm) for 9mm | 2400mm for 12.5mm 8ft (2440mm) for 9mm |
| width | 1200mm for 12.5mm 4ft (1220mm) for 9mm | 1200mm for 12.5mm 4ft (1220mm) for 9mm | 1200mm for 12.5mm 4ft (1220mm) for 9mm |
| uses | Versatile and cost-efficient solution with professional results for all areas | Fire resistance with high performance in order to protect and secure lives and valuables. | Exceptional execution and results in humid areas and spaces. Excellent choice for areas prone to high humidity |
| | | Available with 60 minutes and 120 minutes fire protection certified from international laboratories. | |

GYPCORE

PVC CEILING TILES

NEW



The decorative GYPCORE PVC CEILING TILES are an excellent alternative to decorate ceilings with attractive humidity-resistant designs, as they are available in a wide range of beautiful designs suitable for bathrooms, kitchens and all indoor rooms.

| | |
|-----------------------|---|
| Material | Plasterboard free from asbestos and sulfate |
| Surface | Premium quality PVC |
| Backside | High quality PET aluminized foil |
| Edge | Square |
| Dimension | 595 x 595 mm 603 x 603 mm |
| Thickness and Packing | 7mm - 9 pieces 8mm - 8 pieces 9.5mm - 6 pieces 12.5mm - 5 pieces |
| Standards | ASTMC1396 for the plasterboards |
| Humidity Resitance | < %95 humidity |



GYPCORE SECURE provides a complete range of durable, strong and reliable metal frame components and screws specifically designed to work with **GYPCORE** Plasterboards.

The following types are offered by **SECURE**

1. C Stud 50-
2. U Track 52-
3. C Stud 70-
4. U Track 72-
5. Furring channel
6. Main channel
7. Angle





GLOBAL GYPSUM BOARD CO LLC

| | |
|------------------|--|
| Website | www.gypcore.com |
| E-mail | info@gypcore.com |
| Telephone | +968 2321 9444 |
| Fax | +968 2321 9600 |
| Post | P.O.Box 485 |
| Address | Salalah 211 - Sultanate of Oman |